



Europe, Middle East, Africa South America, Asia

table!





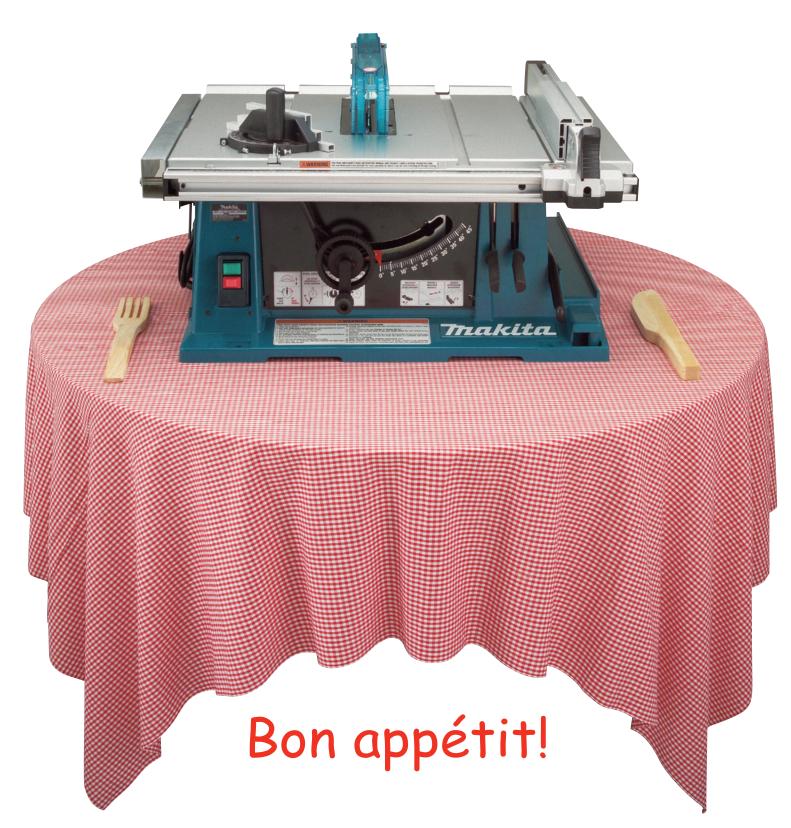

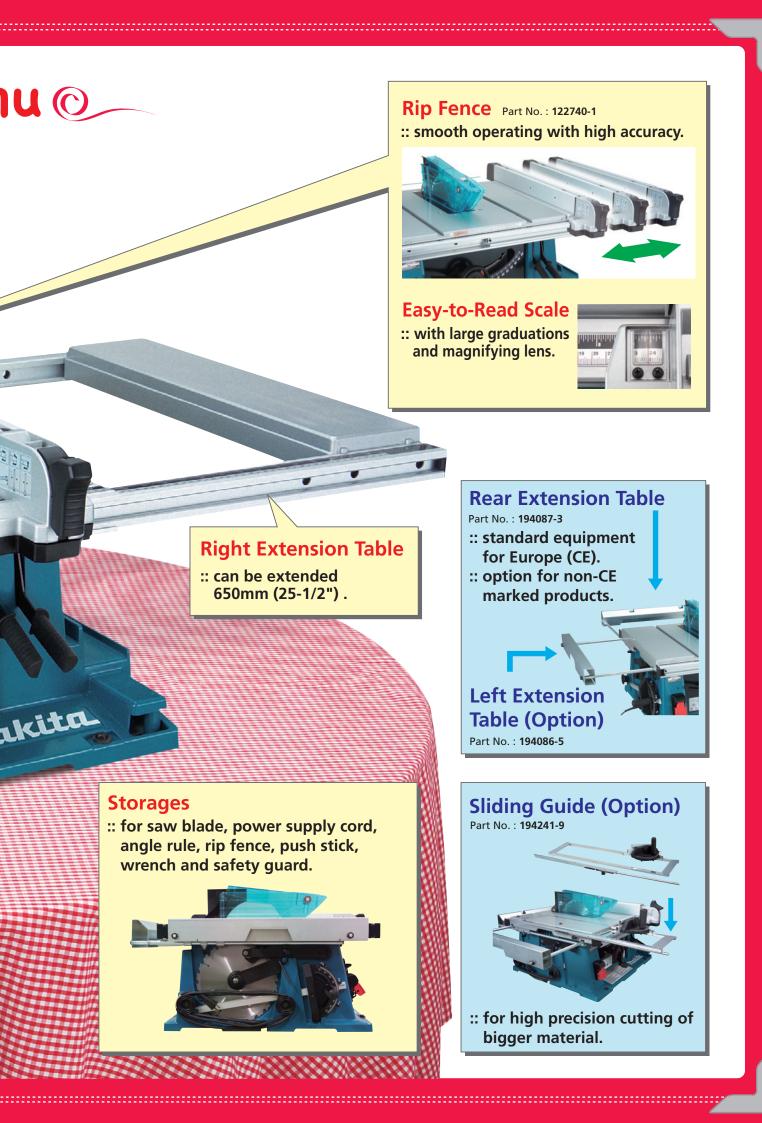


🧼 à la carte 🖭

Wheeled Table Saw Stand









2704 255mm (10") **Table Saw** 153 🛚









Double Insulation



Electric brake



Soft Start 220-240V units 110V(UK) only

Specification

Hole Diameter

Continuous rating Input 1,650W Capacity at 90 degrees : 91mm (3-5/8") / 93mm (3-5/8") (CE) at 45 degrees Blade diameter

: 63mm (2-1/2") / 64mm (2-1/2") (CE) 255mm (10") / 260mm (10-1/4") (CE) 15.88mm (5/8") / 30mm (1-3/16") (CE)

No load speed 4,800rpm Bevel cutting capacity (degrees) -0.5 - 45.5 Dimensions (L x W x H)

: 665mm x 766mm x 344mm (26-1/4" x 30-1/4" x 13-1/2") : 760mm x 766mm x 344mm (CE)

(30" x 30-1/4" x 13-1/2") Net weight 29kg (64lbs) / 34 kg (75lbs) (CE) Power supply cord 2.5m (8.2ft)

Standard Equipment

T.C.T. Saw Blade, Rip Fence, Angle Rule, Wrench 19, Socket Wrench 13-22, Push Stick

Items of standard equipment and specifications may differ from country to country.



Makita Corporation
3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan