



Jig Saw

4350T, 4350CT, 4350FCT

Top Handle Type

4351T, 4351CT, 4351FCT

Body Handle Type

Satisfy Professional's Needs



Bayonet shank
Jig Saw Blade



HIGH QUALITY & RELIABILITY

by Superior Maneuverability



Toolless Blade Change
Enables extremely quick blade changes.

Low Noise
Low Vibration

Electronic
Control*

LED
Job Light*

Capacity in Wood
135mm

Powerful Motor
720W*

*4350CT, 4350FCT, 4351CT, 4351FCT


*4350FCT, 4351FCT

*4350CT, 4350FCT, 4351CT, 4351FCT




Low Noise & Low Vibration

employs lightweight Rod and balance plate mechanism* to reduce vibration dramatically. Reducing vibration makes operator feel more comfortable when cutting various workpieces.

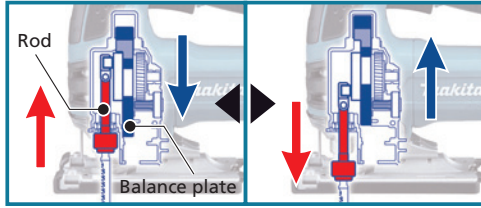

*balance plate mechanism: Counterbalance mechanism to reduce vibration by moving Plate in the opposite direction of Rod

Electronic Control

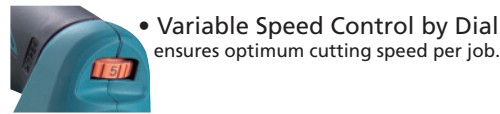

• Variable Speed Control by Dial ensures optimum cutting speed per job.

- Constant Speed Control keeps minimizing the speed loss under loaded conditions.
- Soft Start suppresses the shock when starting.

Comparison of Features and Specifications

| For Model | 4350T | 4350CT | 4350FCT | 4351T | 4351CT | 4351FCT |
|-------------------------|------------|--------|---------|-------------|--------|---------|
| Handle type | Top handle | | | Body handle | | |
| Continuous rating Input | 580W | 720W | 720W | 580W | 720W | 720W |
| Electronic Control | - | ● | ● | - | ● | ● |
| Built-in Job Light | - | - | ● | - | - | ● |

*Electronic Control: Variable Speed Control by Dial, Constant Speed Control and Soft Start


Comparison of Cutting Efficiency

Note: 1. The test results depend to a great extent on the hardness of materials, etc.
2. The numbers in the charts below are relative values when the capacities of 4340FCT are indexed at 100.

Test conditions:

Test material: 48mm thick MDF
Orbital mode: 3 Blade: B-10


Work speed



Test conditions:

Test material: 3.2mm thick SPCC
Orbital mode: 0 Blade: B-22

Work speed



Jig Saw

- Double Insulation
- Orbital Cutting
- Bayonet Shank Jig Saw Blade
- Dust Collecting
- Electronic Speed Control 4350CT/ FCT, 4351CT/ FCT
- Variable Speed 4350CT/ FCT, 4351CT/ FCT
- Soft Start 4350CT/ FCT, 4351CT/ FCT
- Built-in Job Light 4350FCT 4351FCT
- Carrying Case



| | 4350T/ 4350CT/ 4350FCT | 4351T/ 4351CT/ 4351FCT |
|--------------------------------|--|--|
| Continuous rating Input | 580W (4350T) 720W (4350CT/ 4350FCT) | 580W (4351T) 720W (4351CT/ 4351FCT) |
| Capacity | | |
| In wood at 90 degrees | * 135mm (5-5/16") | * 135mm (5-5/16") |
| In steel at 90 degrees | : 10mm (3/8") | : 10mm (3/8") |
| Length of stroke | 26mm (1") | 26mm (1") |
| Strokes per minute (spm) | 2,800 (4350T) 800 - 2,800 (4350CT/ 4350FCT) | 2,800 (4351T) 800 - 2,800 (4351CT/ 4351FCT) |
| Dimensions (L x W x H) | 236 x 73 x 207mm (9-1/4" x 2-7/8" x 8-1/8") | 271 x 73 x 187mm (10-11/16" x 2-7/8" x 7-3/8") |
| Net weight | 2.5kg (5.5lbs) | 2.4kg (5.3lbs) (4351T) 2.5kg (5.5lbs) (4351CT/ 4351FCT) |
| Power supply cord | 2.5m (8.2ft) | 2.5m (8.2ft) |

* when cutting with optional blade No.B-16L
Standard Equipment : Jig Saw Blade Set, Hex Wrench, Cover Plate, Anti-Splintering Device

Items of standard equipment and specifications may differ by country or area.

LED Job Light
(4350FCT, 4351FCT only)

Ergonomically designed rubberized grip
provides more control and comfort.



3 Orbital settings + Straight cutting

Optimum cutting action can be selected by simply turning the change lever.

Dust Nozzle

(Standard Equipment: European countries only)




Dust Nozzle

Can be connected to vacuum with Hose Complete 28-5.

Rigid Aluminum Base

Blower function
keeps the cut line clean.



Cover Plate
Protects workpiece from scratches


Bevel cutting

Aluminum base can be tilted up to 45-degrees to the left or right.

Accessories

Guide Rail

1.4m: Part No. 194368-5
3.0m: Part No. 194367-7



Guide Rule Set

Part No. 193516-3



Guide Rail Adapter Set

Part No. 193517-1



Cover Plate

Part No. 417852-6



Anti-Splintering Device

(For cleaner cuts)
Part No. 192557-6



Dust Nozzle

Part No. 417853-4



Hose Complete 28-5

Part No. A-34229



Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23328-2 2007-08