

9 mm (3/8") Belt Sander


Model 9032






Various sanding arms and sand and 13 mm (1/2"), assures a w

9 mm (3/8") Belt Sander Model 9032

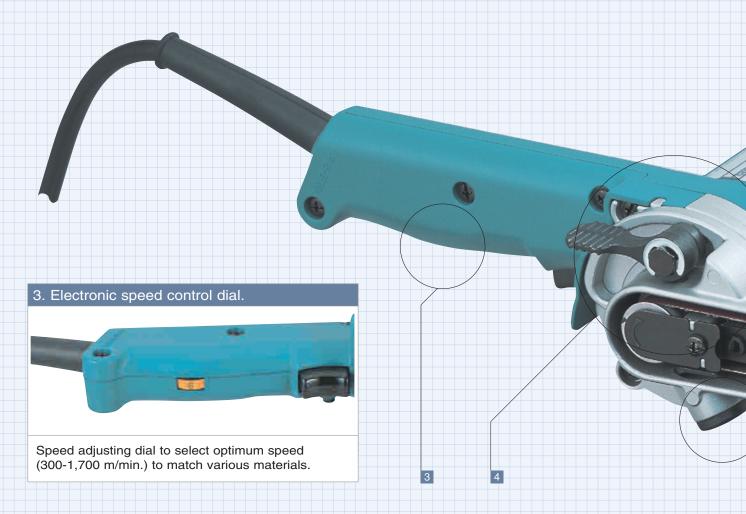


4. Adjustable sanding arm.




All sanding arms can be swiveled at the above angle for your convenience.

5. Dust-free work with dust extraction system.




Dust extraction directly at the power-file sander (See the above feature) assures a dust free and efficient work. Use Dust Nozzle Assembly and Hose 28 (28 mm diameter hose).

ding belt widths, 6 mm (1/4"), 9 mm (3/8") ider range of sanding and filing applications.

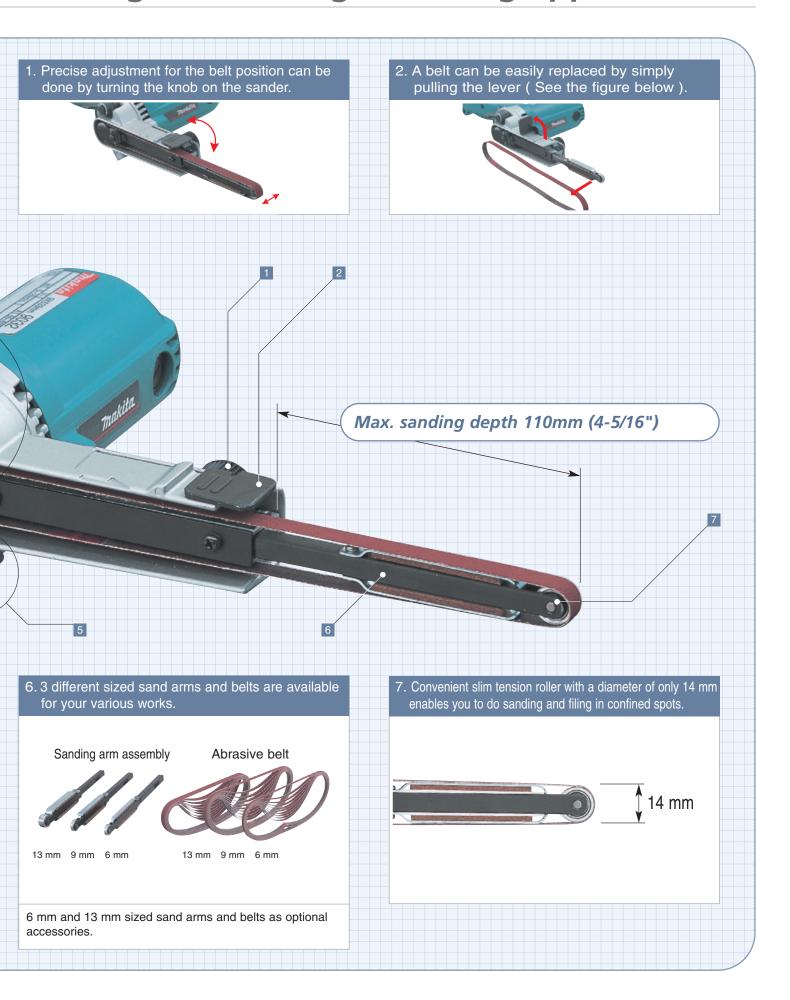

Specifications

Belt Sander

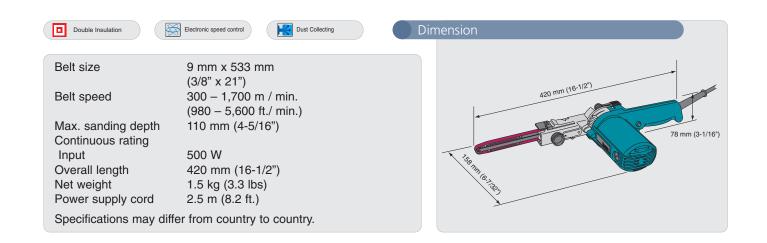

Standard equipment

Belt Sander


	Part No.
Sanding belt 9 - 533 grit 80 2 pcs.	A-34469*
Dust nozzle assembly (only for European countries)	122652-8

^{* 10} pcs/set part No.

Items of standard equipment may differ from country to country.

Optional accessories

Belt Sander

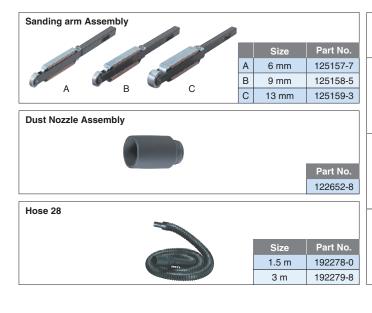

Abrasive Belt (10pcs/set)			
	Size	Grit	Part No.
6 x 53	6 x 533 mm	40	A-34512
		60	A-34528
		80	A-34534
		100	A-34540
		120	A-34556
	9 x 533 mm	40	A-34447
		60	A-34453
		80	A-34469
		100	A-34475
		120	A-34481
	13 x 533 mm	40	A-34562
		60	A-34578
		80	A-34584
		100	A-34590
		120	A-34609