



Satisfy Professional's Needs

## Drywall Screwdriver series

Photo: FS2300

**2,500min<sup>-1</sup>**

FS2200  
FS2300



Photo: FS4200

**4,000min<sup>-1</sup>**

FS4000  
FS4200  
FS4300



Photo: FS6300

**6,000min<sup>-1</sup>**

FS6200  
FS6300  
FS6300R



**Easy handling and  
High maneuverability**



# Compact design

well balanced for easy handling and high maneuverability



## Aluminum gear housing

FS4000: plastic gear housing

## One touch locator

Easy to install or remove

## Ingenious exhaust vents

Exhaust air does not blow dust and debris around when the tool is used close to floor level.

## LED job light

convenient for operation in dark job sites

(not available FS4000)



## Locator holder

convenient for temporary storage of locator during operation



## Bit holder

Spare bit can be stored.

	FS2200	FS2300	FS4000/ FS4200	FS4300	FS6200	FS6300/ FS6300R
Capacity Drywall screw (mm)	5	5	5	5	4	4
No load speed (rpm)	0 - 2,500	0 - 2,500	0 - 4,000	0 - 4,000	0 - 6,000	0 - 6,000
Silent clutch	No	Yes	No	Yes	No	Yes
Net weight *(kg)	1.6	1.6	1.3 / 1.4	1.4	1.4	1.4

\*weight according to EPTA-Procedure 01/2003

## More durable belt clip

composed of a sheet metal sandwiched between plastic layers for added strength

## Best possible tool body for screwdriving

ergonomically designed to;

- minimize hand fatigue and pain even in long continuous operation.
- give maximum power thrust.
- allow for much smoother and easier trigger pull.




## Rubberized soft grip

provides comfortable grip and more control while minimizing hand fatigue and pain.

## Removable power supply cord (FS6300R only)

Length: 4m(13.1ft)

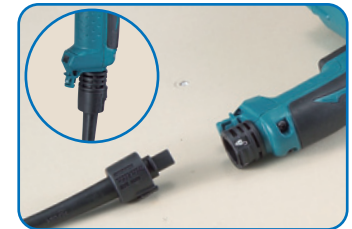

## Drywall Screwdriver FS2200/ FS2300/ FS4000/ FS4200/ FS4300/ FS6200/ FS6300/ FS6300R

419



Double Insulation



Variable Speed



Reversing



Built-in Job Light (not available FS4000)



FS2200



FS4200



FS6300

	FS2200/ FS2300	FS4000/ FS4200/ FS4300	FS6200/ FS6300/ FS6300R
Continuous rating Input	570W	570W	570W
Capacity Drywall screw:	5mm (3/16")	5mm (3/16")	4mm (5/32")
Self drilling screw:	6 mm (1/4")	6 mm (1/4")	-
Driving shank (Hex.)	6.35 mm (1/4")	6.35mm (1/4")	6.35mm (1/4")
No load speed (rpm)	0-2,500	0-4,000	0-6,000
Dimensions (L x W x H)**	FS2200: 287 x 70 x 207mm (11-1/4" x 2-3/4" x 8-1/8") FS2300: 290 x 70 x 207mm (11-3/8" x 2-3/4" x 8-1/8")	FS4000/ FS4200/ FS6200: 269 x 65 x 207mm (10-5/8" x 2-9/16" x 8-1/8") FS4300/ FS6300/ FS6300R: 279 x 65 x 207mm (11" x 2-9/16" x 8-1/8")	
Net weight*	FS2200/ FS2300: 1.6kg (3.5lbs)	FS4200/ FS4300/ FS6200/ FS6300R: 1.4kg (3.1lbs)	FS4000: 1.3kg (2.9lbs)
Power supply cord	2.5m (8.2ft) (FS6300R: 4.0m (13.1ft))		

Standard Equipment Phillips Insert Bit (2pcs.), Magnetic Bit Holder

\*\*for countries providing noise suppressor and connect bit 60  
\*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z15234-2 AJ-BA