



Angle Grinder

GA9050R / GA9050 230mm (9")

GA7050R / GA7050 180mm (7")

Satisfy Professional's Needs



Slim & Powerful

2000W

Photo : GA9050R

Lightweight and Compact body, Reducing operator fatigue in conti

Newly developed motor (diameter: 82mm)

It ensures


- High power (2,000W)
- Light weight
- Slim body of tool

Small gear housing

Makes maximum cutting depth larger.


Rotatable gear housing

Can be positioned at every 90 degrees to suit most cutting and grinding operations.

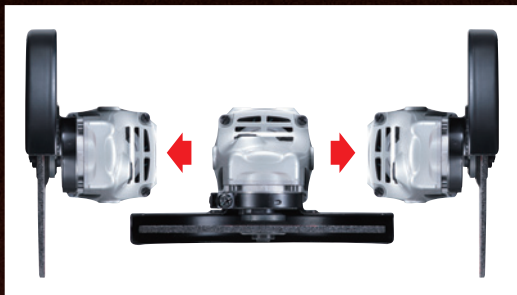

Superior Anti-Dust Structure

Protective zigzag varnish on armature coil.
Protective powder varnish-coating on field coil.
Bearing-protective labyrinth construction.
Vent slots designed to minimize dust entrance.

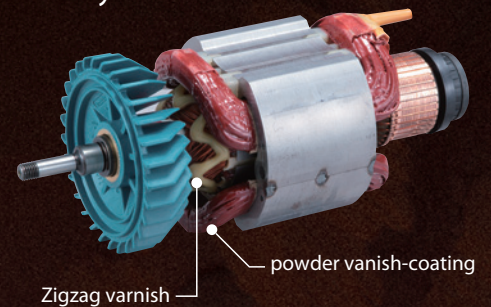

Continuous use

Compact length
455mm (17-7/8")

2000W


Photo : GA9050R

Anti-restart function (GA9050R / GA7050R)


Prevents accidental start-up for safety even if the tool is plugged to power source with the lock-on switch on.

Soft Start Feature (GA9050R / GA7050R)


Suppresses start-up reaction force.



Solid Green indicates that current can be applied to the circuit. (GA9050R / GA7050R)



Blinking Red warns that Anti-restart function is activated. (GA9050R / GA7050R)

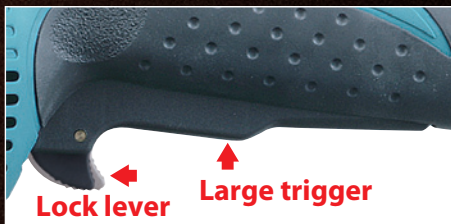

Large trigger switch with a lever for lock-off and lock-on in compliance with the requirement** of the new IEC regulations (for Europe)

By pushing the lever forward, the switch is released from Lock-off position.

By pulling the lever backward, the switch is locked on.

**The lock lever is required to have two different actions for releasing the switch from Lock-off position and locking the switch on.



Dust cover attachment (optional accessory)

Can be installed with one-touch action to seal out coarse dust such as aluminum dust.

Angle Grinder

GA9050R / GA9050 230mm (9")

GA7050R / GA7050 180mm (7")

Accessories

Wheel cover



Type	Part No.	
-	122939-8	for North America
-	122889-7	
Toolless	122846-5	
For 230mm Models: GA9050, GA9050R		
-	122938-0	for North America
-	122891-0	
Toolless	122847-3	

Grip



Type	Part No.	
Stick	152539-0	
Anti Vibration Grip	194543-3	

Sanding lock nut



Spindle thread	Part No.	
M14 x 2 (DIN)	224515-5	
5/8"	224517-1	

Dust Cover Attachment Set



Part No.	
195059-1	

Rubber pad (For abrasive disc)



Outer dia.(mm)	Type	Part No.	
170	-	743012-7	

Wheel cover for diamond/ cut-off wheel



For Model	Part No.	
GA7050, GA7050R	122914-4	
GA9050, GA9050R	122913-6	

Toolless lock nut
Can be remove the wheel without the lock nut wrench.



Spindle thread	Part No.	
M14 x 2 (DIN)	195354-9	



Photo : GA9050R

Angle Grinder

GA9050R / GA9050 230mm (9")

GA7050R / GA7050 180mm (7")

204



Double Insulation



Soft Start
(GA7050R, GA9050R)



	GA9050R	GA9050	GA7050R	GA7050
Continuous rating Input	2,000W	2,000W	2,000W	2,000W
Wheel diameter	230mm (9")	230mm (9")	180mm (7")	180mm (7")
No load speed (rpm)	6,600	6,600	8,500	8,500
Dimensions (L x W x H)	455 x 250 x 132mm (17-7/8" x 9-7/8" x 5-3/16")	432 x 250 x 132mm (17" x 9-7/8" x 5-3/16")	455 x 200 x 132mm (17-7/8" x 7-7/8" x 5-3/16")	432 x 200 x 132mm (17" x 7-7/8" x 5-3/16")
Net weight*	4.8kg (10.6lbs)	4.7kg (10.4lbs)	4.6kg (10.1lbs)	4.5kg (9.9lbs)
Power supply cord	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)

*weight according to EPTA-Procedure 01/2003

Standard Equipment Lock Nut Wrench, Side Grip (Tool does not come with depressed center wheel.)

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BA-AD