




Satisfy Professional's Needs

Rotary Hammer
HR1830F / HR1830 18mm (11/16")




Lightweight and Compact Design

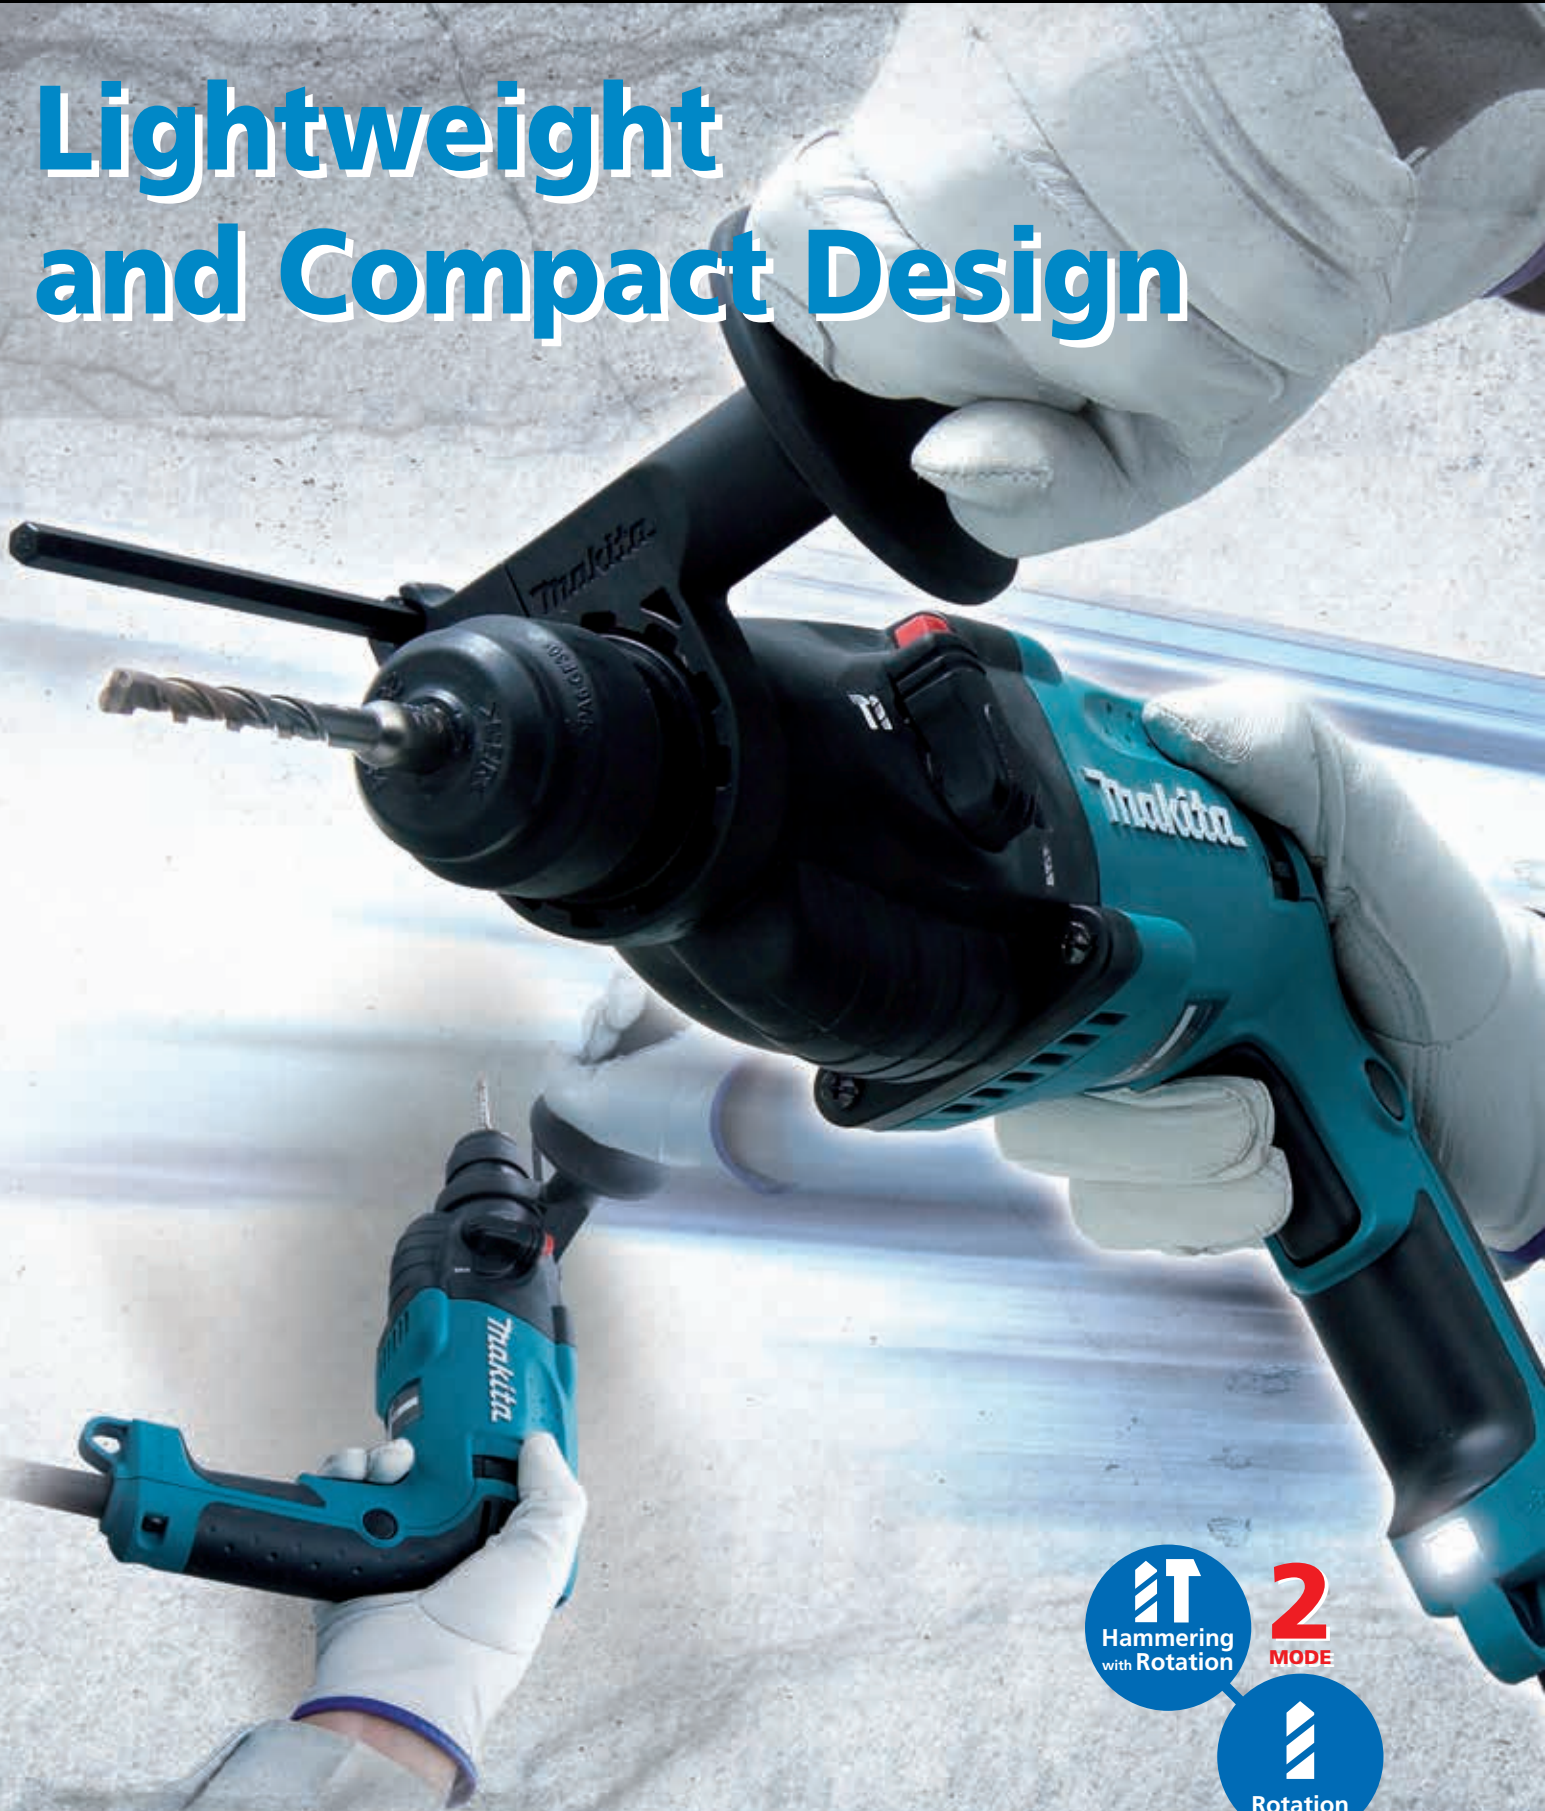

Hammering
with Rotation


2
MODE



Rotation




Lightweight ; 1.7kg
Compact ; 279mm



Rotation Reversing System Using Brush Holder Unit
 Extended service life of carbon brush. Same speed and power even in reverse rotation.

Comparison of Drilling Performance

Note: It may differ under some conditions.

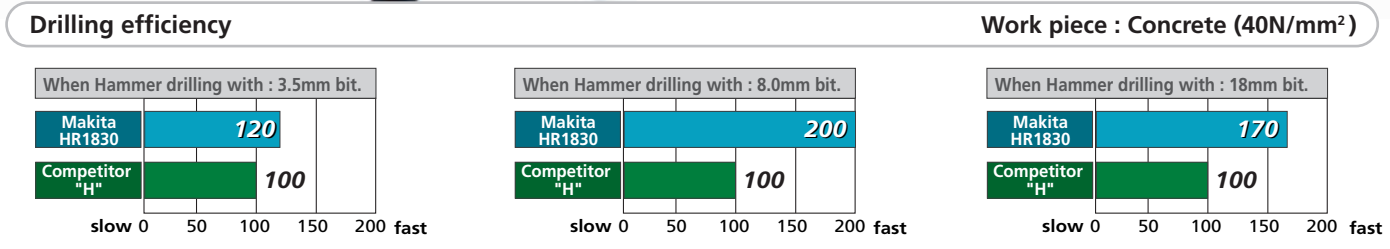

Numbers in the charts above are relative values when the capacity of Competitor "H" model is indexed at 100.

Rotary Hammer

HR1830F / HR1830 18mm (11/16") 419

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Dust Collecting
- SDS-Plus Shank
- Carrying Case
- Built-in Job Light (HR1830F only)



Continuous rating Input Capacity	440W Concrete : 18mm (11/16") Steel : 13mm (1/2") Wood : 24mm (15/16")
Blows per minute	0-5,000bpm
No load speed	0-1,500rpm
Dimensions (L x W x H)	279mm x 66mm x 208mm (11" x 2-5/8" x 8-3/16")
Net weight	1.7kg (3.7lbs)
Power supply cord	2.5m (8.2ft)

Standard Equipment Depth Gauge, Grip (Tool does not come with bit)

Items of standard equipment and specifications may differ from country to country.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23257-2 2006-07