




Satisfy Professional's Needs

Combination Hammer
HR3541FC / HR3540C 35mm (1-3/8")



**Most Lightweight in
SDS-max Hammers**

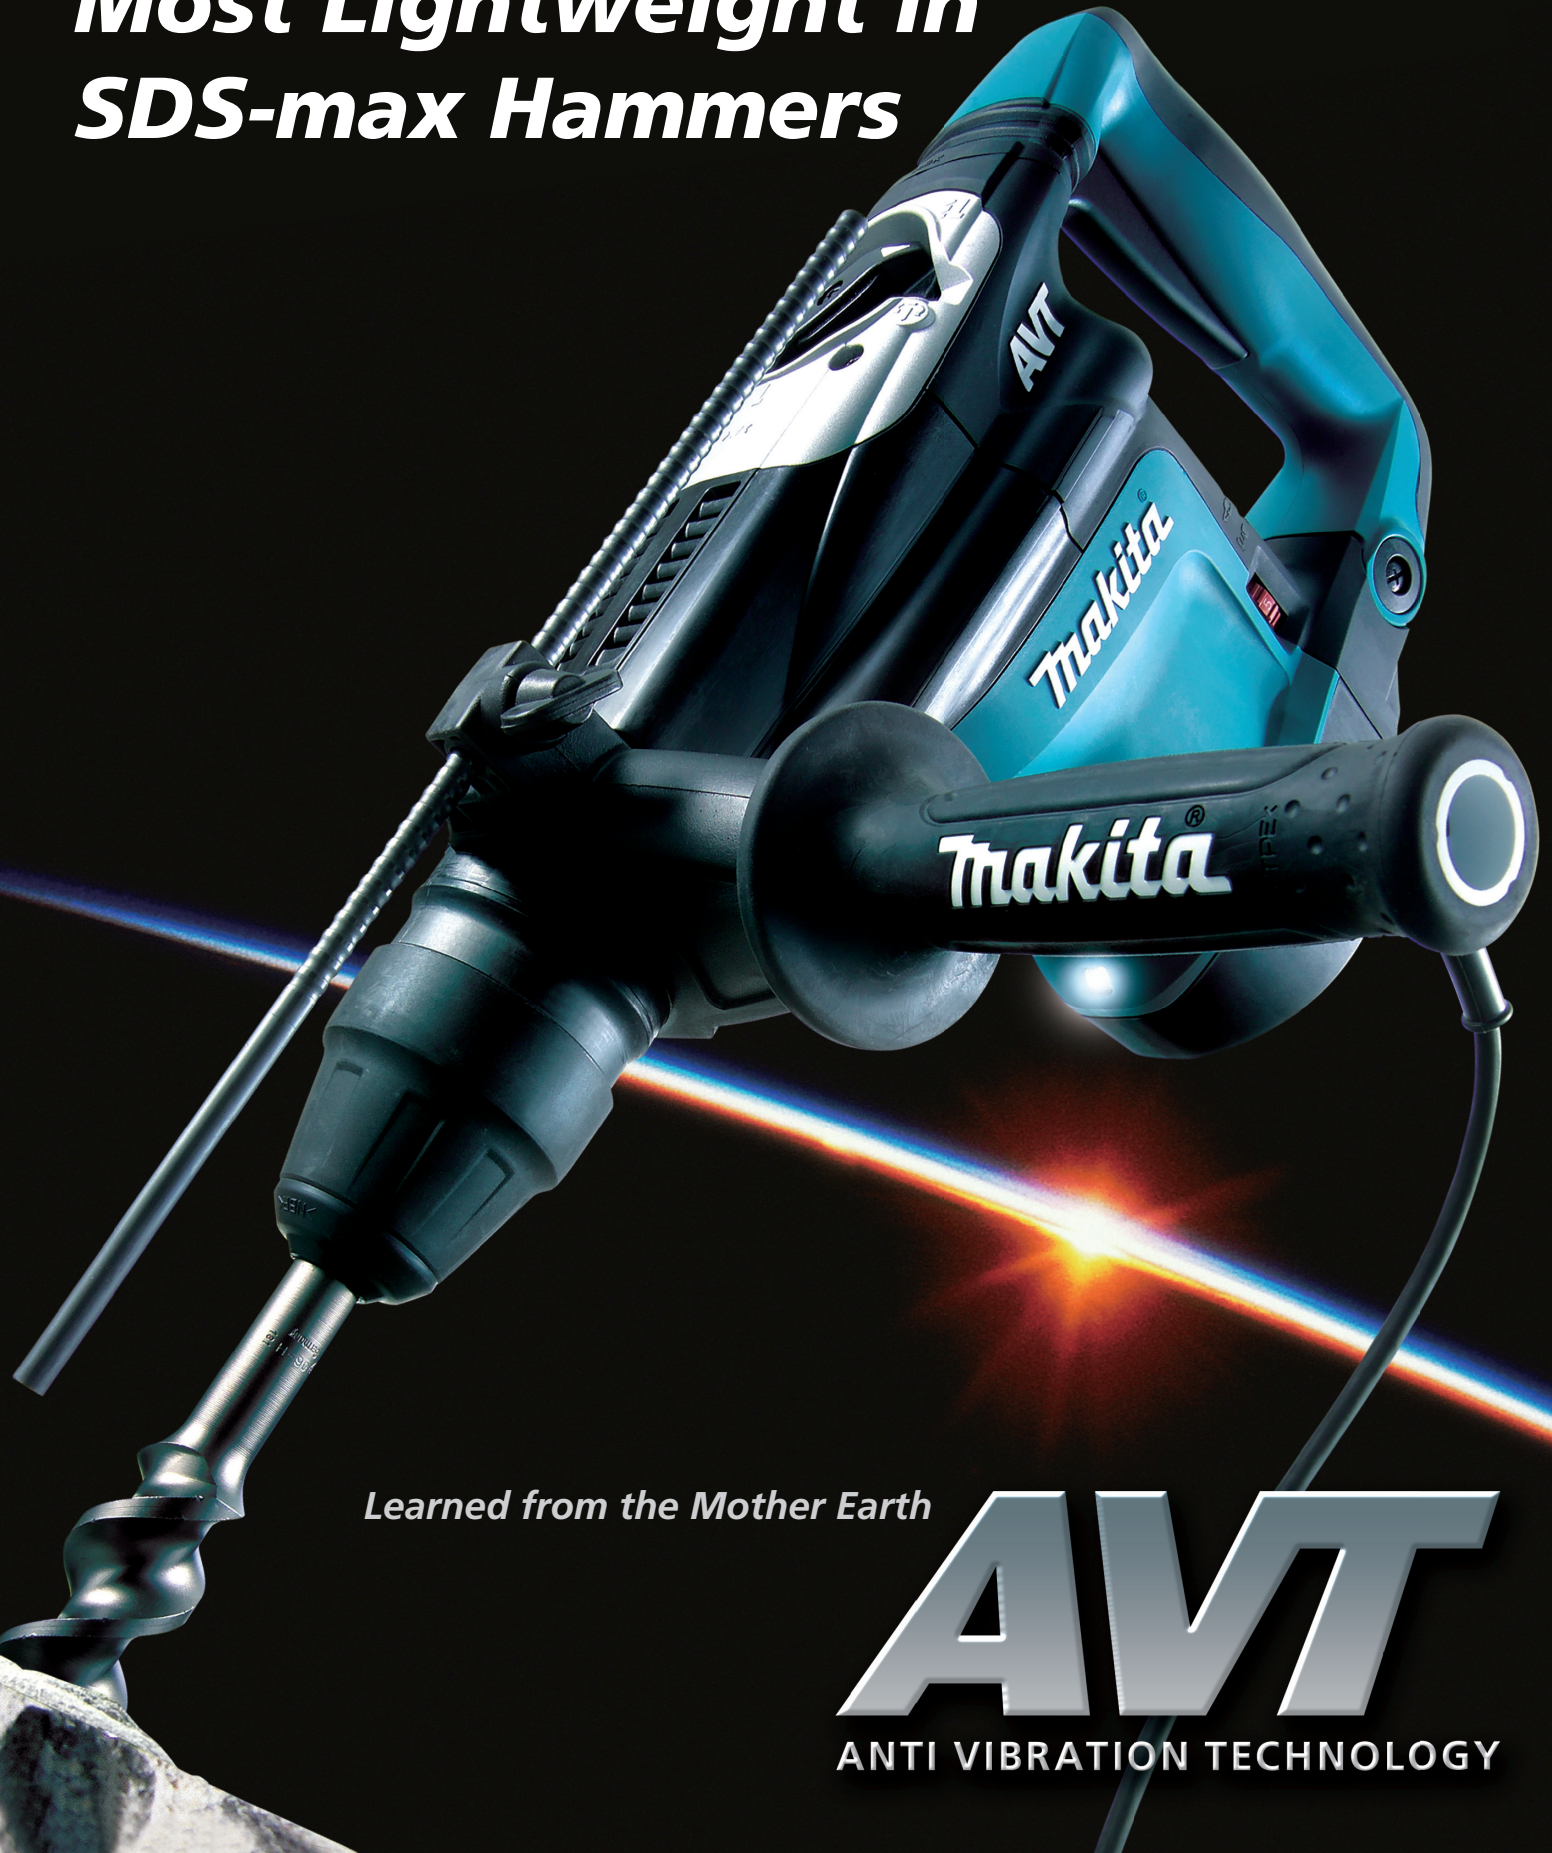

Learned from the Mother Earth

AVT
ANTI VIBRATION TECHNOLOGY

AVT

ANTI VIBRATION TECHNOLOGY


Learned from the Mother Earth

How to generate POWER
 How to manage VIBRATION
 How to bring you COMFORT



THE MOTHER EARTH SOMETIMES QUAKES.


Principle of Dynamic Vibration Absorber



MAKITA's "Active" Dynamic Vibration Absorber

(HR3541FC only)

Shift of air pressure in crank room and barrel room "actively" controls balancer to move opposite of piston.

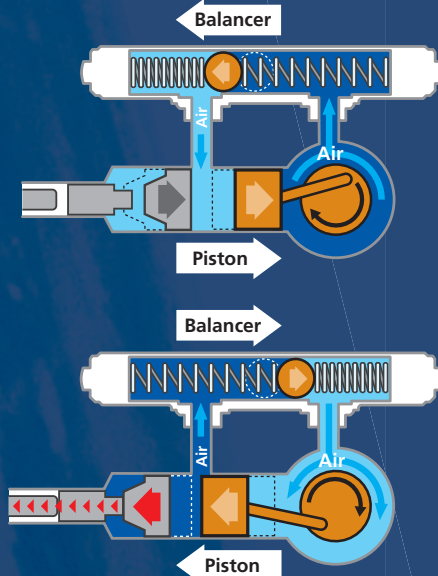

Vibration Absorbing Grip

(HR3541FC only)

Spring loaded hinged grip absorbs vibration



See the Result of AVT



	25min	50min
HR3541FC	<div style="width: 10%;"></div>	<div style="width: 10%;"></div>
HR3540C	<div style="width: 30%;"></div>	<div style="width: 30%;"></div>
Competitor "H"	<div style="width: 50%;"></div>	<div style="width: 50%;"></div>

Vibration level 10m/s²


*It is known as the tri-axial value and value at Directive of...
 **It means the maximum amount of vibration that an oper...



Simple Single-Lever Control for Changing Operation Mode

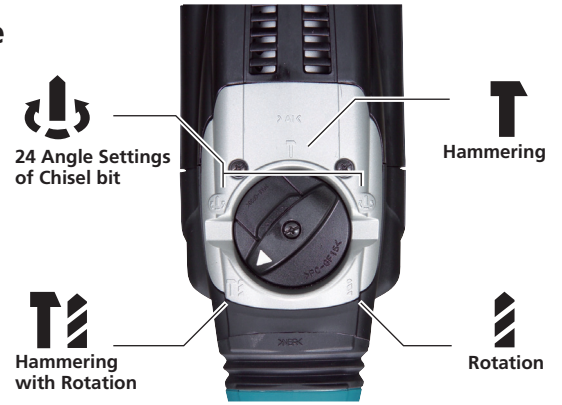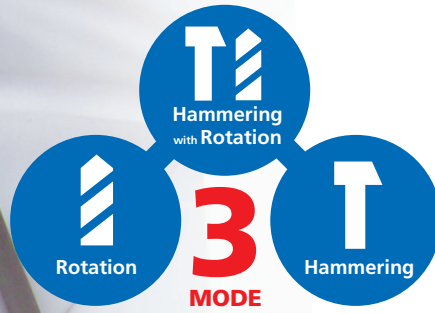

HR3541FC SDS-max Shank

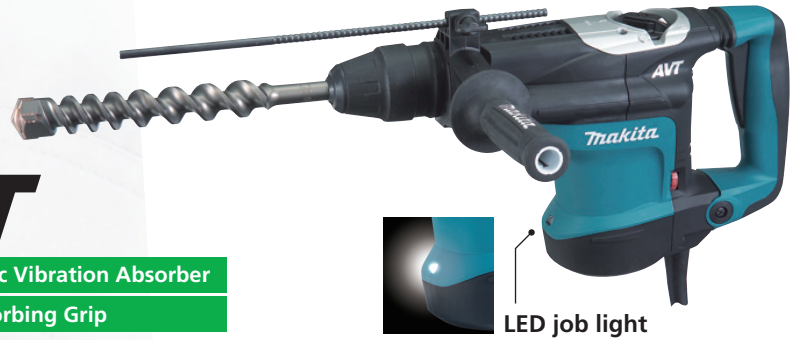

HR3540C SDS-max Shank




LED lamp
for indication of "Green"
:: being electrified of
"Blinking Red"
:: replacing of carbon brush




Auto Cut-Out Carbon Brush
protects commutator and indicates time for maintenance.

Electronic control features
Variable speed control by dial Constant speed control, Soft Start variable speed control



No Hammering while Idling
ensures machine's long life.



Slide Chuck
:: push-in and Go
:: slide-back and Pull



Torque Limiter
when drill bit hits against reinforcements, Torque Limiter operates to stop.



Rubberized Soft Grip
provides more control and comfort while minimizing hand fatigue and pain. (HR3541FC only)



24 Angle Settings of Chisel bit



Change Lever in protected position
for reduced possibility of breakage even if the machine is carelessly down to rest.

Comparison of Vibration level* and Time to reach Exposure Limit of Vibration)**

75min	100min	Time to reach ELV
1.0m/s ²	18.0m/s ²	99min
	17.2m/s ²	37min
15m/s ²	20m/s ²	41min

A(8).
operator may be exposed to on any single day.

Tool does not come with bit.



Photo: HR3541FC

Optional Accessories

Side Handle (Bar-shaped)
Part No 135209-6



Keyless Drill Chuck Assembly
Part No 122829-5



Side Handle (D-shaped)
Part No 134890-0



Photo: HR3541FC (with Keyless Drill Chuck Assembly)

Combination Hammer		HR3541FC / HR3540C 35mm (1-3/8")	350
Double Insulation	Variable Speed	Electronic Speed Control	Soft Start
Torque Limiter	SDS-Max Shank	Carrying Case	Built-in Job Light (HR3541FC only)
Continuous rating Input		HR3541FC	HR3540C
		850W	850W
Max. bit dia.		35mm (1-3/8")	35mm (1-3/8")
Max. core bit dia.		90mm (3-1/2")	90mm (3-1/2")
Impacts per minute (ipm)		1,650-3,300	1,650-3,300
No load speed (rpm)		315-630	315-630
Dimensions (L x W x H)		439 x 114 x 239mm (17-1/4" x 4-1/2" x 9-3/8")	439 x 108 x 239mm (17-1/4" x 4-1/4" x 9-3/8")
Net weight		5.6kg (12.3lbs)	5.2kg (11.4lbs)
Power supply cord		5.0m (16.4ft)	5.0m (16.4ft)
Standard Equipment			
Depth Gauge, Side Handle (Bar-shaped), Bit Grease (Tool does not come with bit.)			

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23425-2 AJ-AB