



Rotary Hammer

HR4011C, HR4010C, HR4001C 40mm



LEARNED from
the MOTHER EARTH




AVT

ANTI VIBRATION TECHNOLOGY



Learned from the Mother Earth

How to generate **POWER**
 How to manage **VIBRATION**
 How to bring you **COMFORT**

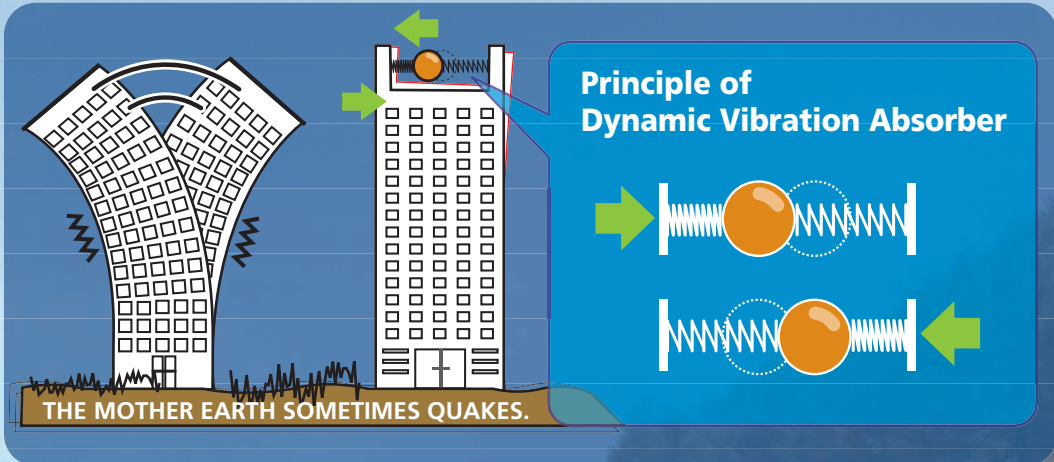

Use Makita's new hammer...
 Enjoy your job comfortably...
 Look after your body with the tool...
 Finish your job quicker with the power...
 Then you can go home earlier...
 Enjoy your healthy life on...
 the Mother Earth

MAKITA's "Active" Dynamic Vibration Absorber (HR4011C and HR4010C)

Shift of air pressure in crank room and barrel room "actively" controls balancer to move opposite of piston.

Vibration Absorbing (HR4011C only)

Spring loaded hinged grip absorbs vibration

See the Result of AVT...
 ...what Makita has learnt from t

Vibration level	
Makita	HR4011C
Makita	HR4010C
Makita	HR4001C
Makita	HR4000C predecessor model
Competitor 1	
Competitor 2	
	Low 2.5




Photo : HR4011C

l of less vibration...
powerful machine...

Grip



the Mother Earth.



Name Plate

- :: Located on low damage risk area



Slide Chuck

- :: Push-in and Go
- :: Slide-back and Pull



LED

- :: Green :Electrified
- :: Red :Replacement of carbon brush



Dial

- :: Variable speed control




Soft Grip

- :: For comfort

Makita's predecessor model

New



Repair Friendly

- :: Simple wiring inside
- :: Chuck with less number of components



Mode Change Lever

- :: Located on low damage risk area
- :: Protected by robust aluminum top

HR4011C Extremely Comfortable


Easiest to manage the exposure of vibration to hands and arms.



AVT

Tool does not come with bit

- Active Dynamic Vibration Absorber
- Vibration Absorbing Grip

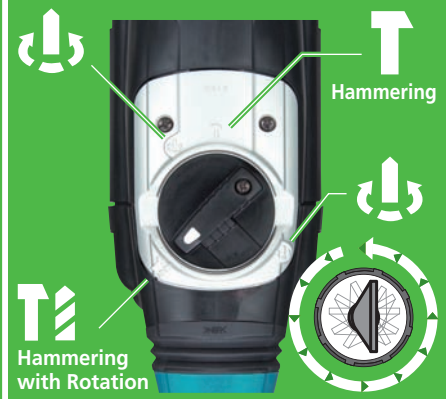

HR4010C Easy and Very Comfortable

Easier to manage the exposure of vibration to body.
Easy operating Slide Lock-on Switch for hammering.



AVT

Tool does not come with bit

- Active Dynamic Vibration Absorber



Selectable Switches



HR4001C Easy and Comfortable

Slide Lock-on switch leaves operators' fingers out of effort to keep pulling trigger for long hours when hammering.




Tool does not come with bit




Drilling Speed

Drill 35 mm Concrete 35N / mm²

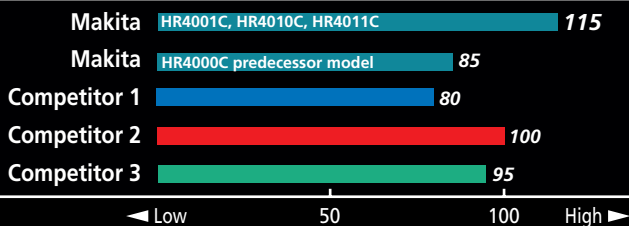

Demolition Speed

Concrete 35N / mm²

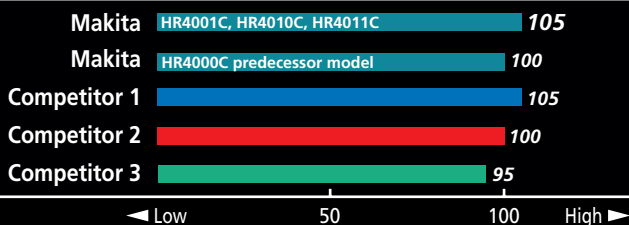

Numbers in chart are relative values when the capacity of competitor 2 is indexed at 100.



Rotary Hammer

350mm

HR4011C, HR4010C, HR4001C 40mm

- Double Insulation
- Torque Limiter
- Variable Speed
- SDS-Max Drive
- Electronic Speed Control
- Carrying Case
- Soft Start

	HR4011C	AVT	HR4010C	AVT	HR4001C
Anti vibration technology	Active Dynamic Vibration Absorber Vibration Absorbing Grip		Active Dynamic Vibration Absorber		
Switch	Trigger only		Slide lock-on and Trigger		Slide lock-on and Trigger
Continuous rating Input	1,100W		1,100W		1,100W
Max. bit dia.	40mm (1-9/16")		40mm (1-9/16")		40mm (1-9/16")
Max. core bit dia.	105mm (4-1/8")		105mm (4-1/8")		105mm (4-1/8")
Blows per minute	1,350-2,750		1,350-2,750		1,350-2,750
No load speed	235-480rpm		235-480rpm		235-480rpm
Dimensions (L x W x H)	468mm x 116mm x 261mm (18-1/2" x 4-9/16" x 10-1/4")		468mm x 116mm x 261mm (18-1/2" x 4-9/16" x 10-1/4")		468mm x 106mm x 261mm (18-1/2" x 4-3/16" x 10-1/4")
Net weight	6.3kg (13.9lbs)		6.3kg (13.9lbs)		5.9kg (13.0lbs)
Power supply cord	5.0m (16.4ft)		5.0m (16.4ft)		5.0m (16.4ft)

Standard equipment : Depth Gauge, Grip Assembly, Grease Vessel (Tool does not come with bit)

*Standard equipment and Specifications may differ by country or area.