

The Makita logo is displayed in white text on a red rectangular background. The word "Makita" is written in a stylized, italicized font with a registered trademark symbol (®) to the upper right.

new

Recipro Saw  
JR3060T, JR3070CT

A person wearing a white long-sleeved shirt and a black protective glove with "AVT" written on it is using a blue and black Makita reciprocating saw to cut through a large black pipe. The saw blade is visible, cutting through the pipe. The background is a dark blue with a subtle grid pattern.

*Cutting Edge*

**AVT**™

ANTI VIBRATION TECHNOLOGY

AVT : Model JR3070CT only

A world's leading manufacturer of power tools



*Muscle*  
**■ JR 3060 T ■**


# "Cutting Edge" Brothers

**■ JR3070CT ■**  
*Big Brother*




## JR3060T

Comparison of efficiency : cutting wood  
 Blade used : Standard equipped blade of each brand

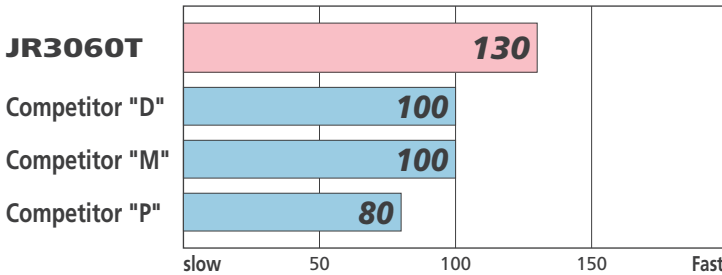

## JR3070CT

Comparison of efficiency : cutting carbon steel pipe  
 Blade used : Standard equipped blade of each brand

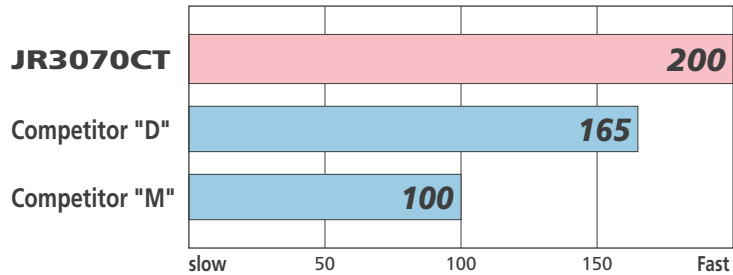

Note : Numbers in the chart are relative values when the capacity of competitor "M" is indexed at 100.

**AVT™**  
 ANTI VIBRATION TECHNOLOGY



**EXTRA COMFORT with AVT**

**VIBRATION 50% CUT**


AVT featured JR3070CT only : Vibration 9 m/s<sup>2</sup>  
 Against Makita's predecessor model JR3020 and equivalent model of competitor "M" under operational load.

### Dust Proof Design No.1



Air from inside prevent the dust collected around slider.

### Dust Proof Design No.2



Ring, and Rubber Seal protect gear room against dust.



### Orbital Action

Selectable its degree with this lever for faster cutting in thick materials.

### Constant Speed

Built-in controller maintains constant stroke speed under operational load. (JR3070CT only)

### Large Trigger

for easier control

### Torque Limiter


protects gear mechanism and operator against accidental blade lock-up.

### Soft Grip

for your comfort


Photo : Model JR3070CT

Photo : Model JR3060T

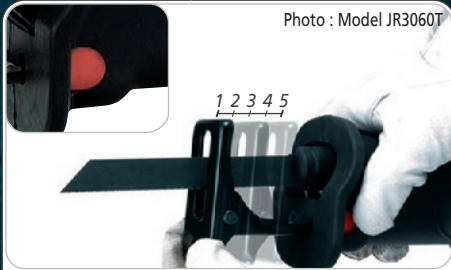

Shoe position can be adjusted in 5 positions.

Photo : Model JR3060T

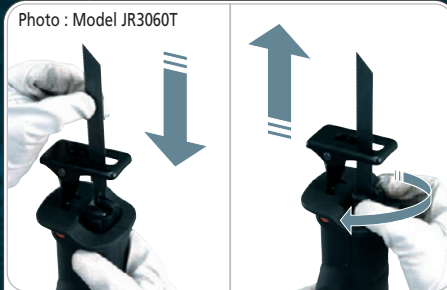


Tool-less Blade Change




### Preset Dial for Speed Control

Enables to select the optimal stroke speed for application. (JR3070CT only)


## Extra-Low Vibration achieved by Counter Weight Mechanism

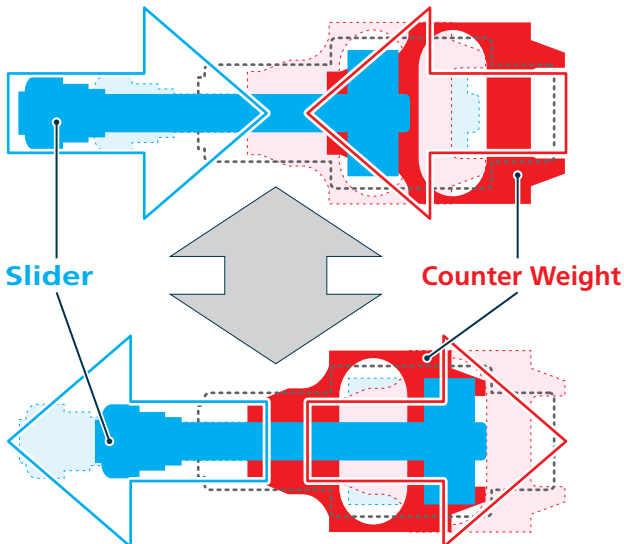

### Model JR3070CT with AVT

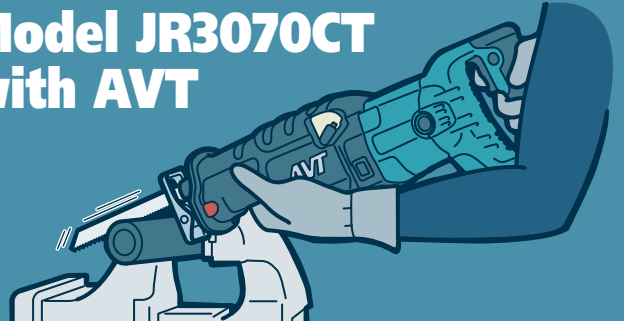

### without AVT

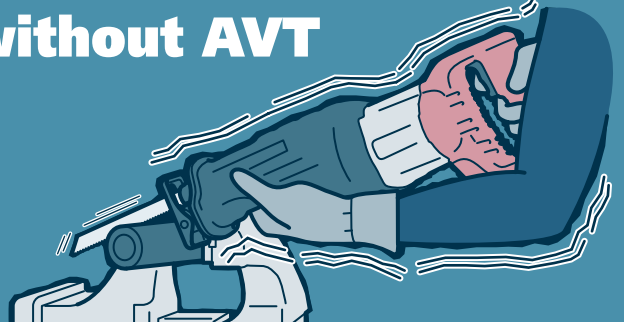

# SPECIFICATIONS

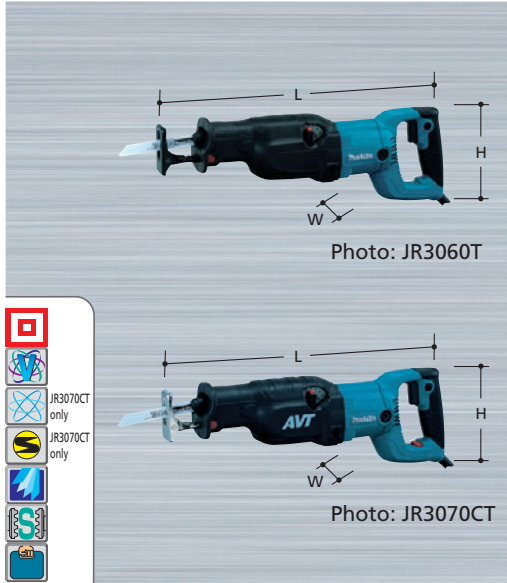


Photo: JR3060T

Photo: JR3070CT











	JR3060T	JR3070CT
Rating Amperage for North America	12 A	15 A
Continuous rating Input Capacities	1,250 W	1,510 W
(when 300 mm blade used)	in pipe : $\phi$ 130 mm (5-1/8")	in pipe : $\phi$ 130 mm (5-1/8")
Length of stroke	in wood : 255 mm (10")	in wood : 255 mm (10")
Strokes per min.	32 mm (1-1/4")	32 mm (1-1/4")
Orbital function	0-2,800	0-2,800
Speed control	Yes	Yes
Constant speed	No	Yes
AVT	No	Yes
Vibration	No	Yes
Dimensions (L x W x H)	14 m / s <sup>2</sup>	9 m / s <sup>2</sup>
Net weight	485 mm x 99 mm x 181 mm	485 mm x 99 mm x 181 mm
Power supply cord standard equipment	(19-1/8" x 3-7/8" x 7-1/8")	(19-1/8" x 3-7/8" x 7-1/8")
	4.2 kg (9.3 lbs)	4.3 kg (9.5 lbs)
	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)
	Recipro saw blade (3pcs.)	Recipro saw blade (3pcs.)

Specifications may differ from country to country.  
Items of standard equipment may differ from country to country.

# OPTIONAL ACCESSORIES

## Recipro saw blade

A : Includes nail embedded wood.

Blade type	Teeth per inch	Overall length (mm)	application	Type	Pc. per pkg.	Part No
No.21 	24	120	For steel plate 3 mm thick or less. For iron pipe 50 mm dia. or less.	-	5	792146-3
					2	B-00804
No.22 	18	160	For steel plate, aluminum sash more than 3 mm thick. For iron pipe 90 mm dia. or less.	-	5	792147-1
					2	B-00810
No.23 	9	160	Wood cutting under 90 mm.	A	5	792148-9
					2	B-00826
No.23B 	6	160	Wood cutting under 90 mm. For fast finish work.	-	5	792707-9
No.24 	24	160	For steel plate 3 mm thick or less. For iron pipe 50 mm dia. or less.	-	5	792149-7
					2	B-00832
No.3019 	4	150	For roughing-in work in thick wood.	-	5	A-02303
No.3020 	10	150	For wood, plywood. 5	A	5	A-02319
No.3022 	6	150	For scroll cutting of plywood and other laminates.	-	5	A-02331
No.3023 	10	250	For wood, plywood.	-	5	B-00767
No.3030 	6	300	For roughing-in work in thick wood.	-	5	B-03030