



A world's leading manufacturer of power tools

180mm (7")

## Electronic Polisher

Model PV7001C/PV7000C

(600~2,000 min<sup>-1</sup>)

## Polisher

Model PV7001

(1,700 min<sup>-1</sup>)

180mm (7")

## Electronic Disc Sander

Model GV7000C

(2,500~4,700 min<sup>-1</sup>)

## Disc Sander

Model GV7000

(4,700 min<sup>-1</sup>)

*Newly designed compact and light weight body, also equipped with advanced functions for professional Polishing/Sanding.*



Photo:Model PV7000C



Photo:Model GV7000

**NEW**



A world's leading manufacturer of power tools

# Perfect polishing with High(6



Photo: Model PV7000C

## Electronic Polisher

PV7000C



PV7001C



## Polisher

PV7001



Photo: Model GV7000

## Electronic Disc Sander

GV7000C



## Disc Sander

GV7000



Double Insulation



2 Speed



Constant Speed





Variable Speed



Soft Start feature

# 600-2,000min<sup>-1</sup>/Low(600min<sup>-1</sup>)selecting button.

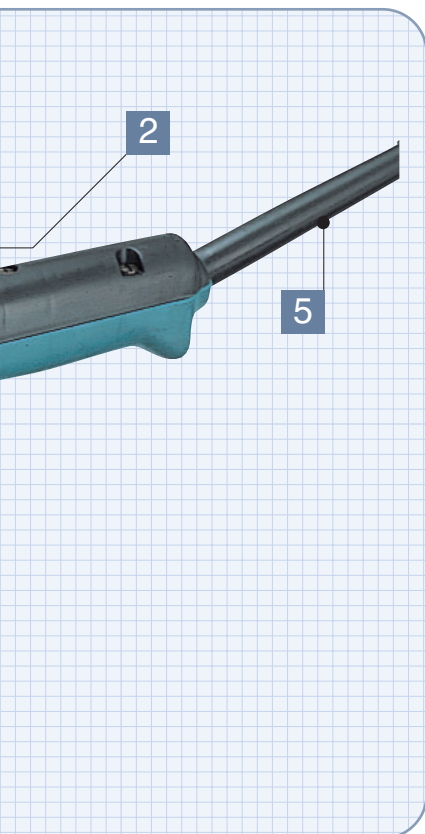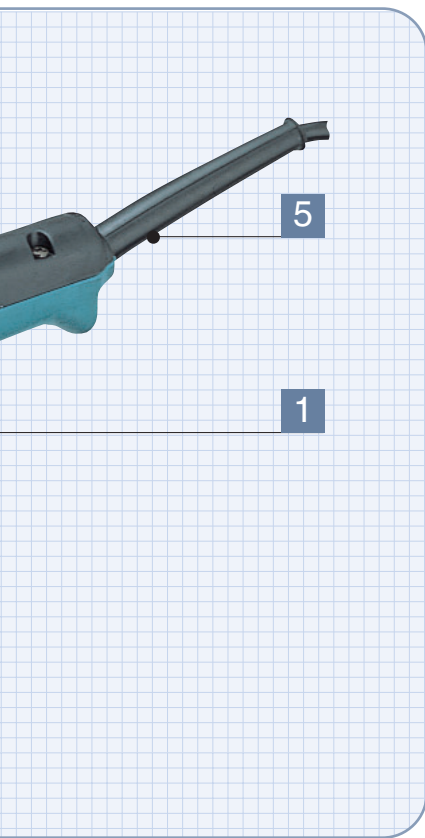

## 1. Speed Selecting Button for High/600-2,000min<sup>-1</sup> (Variable) and Low/600min<sup>-1</sup> (Single)

PV7000C, PV7001C

**PUSH LEFT BUTTON**  
**High**  
600-2,000min<sup>-1</sup>  
(Variable)

**PUSH RIGHT BUTTON**  
**Low**  
600min<sup>-1</sup>  
(Single)

Quick speed mode change with one hand can be done without interruption of polishing job.

Spreading compounds with low speed mode (push right button).

After spreading compounds, change to high speed mode (push left button).

Starts polishing with high speed mode.

## 2. Electronic Controller and Speed Control Dial

PV7000C, PV7001C, GV7000C



Dial Number	PV7000C PV7001C	GV7000C GV7001C
1	600 min <sup>-1</sup>	2,500 min <sup>-1</sup>
2	800	2,800
3	1,300	3,500
4	1,800	4,200
5	2,000	4,700

Even in heavy-duty work, you can obtain a constant speed for high polishing/sanding performance. With Speed Control Dial, you can select the optimum rotating speed to suit various work pieces. Soft-start feature will also assure a smooth and comfortable start.

## 3. "Hook & Loop" Backing Pad

PV7000C, PV7001C, PV7001



For quick replacement of polishing accessories.  
\*Note;  
These polishers also accept the conventional rubber pad. GV7000C and GV7000 are equipped with the conventional rubber pads.

## 4. Ideally Balanced Design for Steady Polishing/Sanding

Ensures optimum handling thanks to the lower positioned center of gravity.

The lower positioned center of gravity thanks to short distance shown as below.








## 5. Cord Guard Improved More in Durability and Flexibility

More durable against disconnection than ever, thanks to the flexible and elastic rubber cord guard.

# Specifications

Electronic Polisher, Electronic Disc Sander

Model		Electronic Polisher		Polisher	Electronic Disc Sander	Disc Sander
		PV7000C	PV7001C	PV7001	GV7000C	GV7000
						
Max. capacities	Sponge pad / Wool bonnet	180 mm (7")	180 mm (7")	180 mm (7")	180 mm (7")	180 mm (7")
	Abrasive disc	180 mm (7")	180 mm (7")	180 mm (7")	180 mm (7")	180 mm (7")
Continuous rating Input		900 W	900 W	550 W	900 W	550 W
No load speed		600 - 2,000 min <sup>-1</sup> (rpm)	600 - 2,000 min <sup>-1</sup> (rpm)	1,700 min <sup>-1</sup> (rpm)	2,500 - 4,700 min <sup>-1</sup> (rpm)	4,700 min <sup>-1</sup> (rpm)
Overall length		210 mm (8-1/4")	210 mm (8-1/4")	210 mm (8-1/4")	210 mm (8-1/4")	210 mm (8-1/4")
Net weight		2.0 kg (4.4 lbs)	2.0 kg (4.4 lbs)	2.0 kg (4.4 lbs)	2.0 kg (4.4 lbs)	2.0 kg (4.4 lbs)
Power supply cord		2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)
Speed selecting button for Low (single) or High (variable)		✓	✓	—	—	—
Variable speed control dial		✓	✓	—	✓	—
Electronic speed control		✓	✓	—	✓	—
Electronic soft start		✓	✓	—	✓	—
Protection from electric shock		Double insulation	By grounding	By grounding	Double insulation	Double insulation
Hook & Loop pad		✓	✓	✓	—	—








## Standard equipment

Electronic Polisher, Electronic Disc Sander

Model	PV7000C	PV7001C	PV7001	GV7000C	GV7000
Side grip	273649-1	North America(36) / Asia(34) 152491-2 / 273499-4	North America(36) / Asia(34) 152491-2 / 273499-4	152491-2	152491-2
Wrench	781008-0	781008-0	781008-0	781008-0	781008-0
Pad (Hook & Loop type)	Part No. differs from country to country. See below.				
Rubber pad	—	—	—	743012-7	743012-7
Lock nut	—	—	—	Part No. differs from country to country. See below.	
Lock nut wrench	—	—	—	782412-6	782412-6
Abrasive disc	—	—	—	#80 1pc.	#80 1pc.

## Optional accessories

Electronic Polisher, Electronic Disc Sander

<b>Sponge pad (Hook &amp; loop type)</b> 	For Model		Part No.	<b>Abrasive disc</b> for stone and plastics. (10 pcs./set) 	For Model	Disc diameter	Grit	Part No.
	PV7000C, PV7001C, PV7001		794620-7					#16
<b>Pad (Hook &amp; loop type)</b> 	For Model		Spindle thread	GV7000C GV7000	180 mm		#20	794092-6
	PV7000C, PV7001C, PV7001		14mm				#24	794093-4
			5/8"				#30	794218-0
<b>Rubber pad</b> 	For Model		Part No.	<b>Lock nut</b> 	For Model	Spindle thread	Part No.	
	GV7000C, GV7000		743012-7				14mm	224515-5
							5/8"	224517-1
			16mm	224523-6				
				<b>Lock nut wrench</b> 	For Model		Part No.	
					GV7000C, GV7000	782412-6		
				<b>Wrench</b> 	For Model		Part No.	
					GV7000C, GV7000	781008-8		

Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z14297-2 2001-1