



# Chain Saw UC3041A/ UC3541A/ UC4041A



Photo: UC4041A

## Tool-less saw chain/ tension adjustment

300mm (12") UC3041A/ 350mm (14") UC3541A/ 400mm (16") UC4041A

# New adjustment lever for easier tool-less saw chain/ tension adjustment



Easy-to-grip Front loop handle  
The whole shape is firmly held, especially when the machine is tilted sideways.

Photo : UC3541A

Soft rear-handle



1. extendable to allow for:
  - Easier saw chain tightening
  - Higher tightening torque
2. can be quickly retracted at any angle.
3. reduces the projections on Sprocket cover than ever.




## Improved oil pump

keeps the delivery of chain oil constant regardless of temperature and the oil viscosity.



## Large view window of Oil tank

allows operator to easily check oil level.

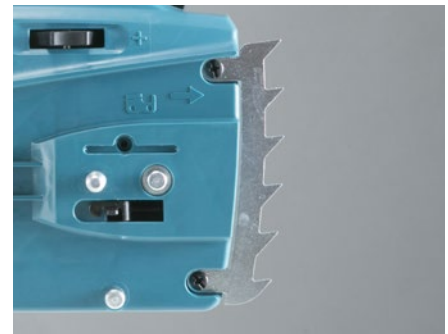

## Large separate-type metal spike bumper

An optimum design has been achieved by employing separate-type. The spike grips workpiece firmly to provide more control.

## Chain Saw

**UC3041A** 300mm (12"), **UC3541A** 350mm (14"), **UC4041A** 400mm (16")

153

- Double Insulation
- Brake
- Automatic Oiling
- Chain Brake

Dimensions :  
excluding blade and guide bar



<b>Continuous rating input</b>	1,800W
<b>Chain speed per minute</b>	870m/min (2,900ft/min)
<b>Guide bar length</b>	UC3041A: 300mm (12") UC3541A: 350mm (14") UC4041A: 400mm (16")
<b>Chain blade</b>	Pitch: 3/8" Gauge: 0.043" / 0.050"
<b>Dimensions (L x W x H)</b>	455x245x200mm (17-7/8"x9-5/8"x7-7/8")
<b>Net Weight*</b>	UC3041A: 4.6kg (10.1lbs) / 4.7kg (10.3lbs) UC3541A: 4.7kg (10.3lbs) / 4.8kg (10.5lbs) UC4041A: 4.7kg (10.4lbs) / 4.8kg (10.6lbs)
<b>Power supply cord</b>	0.3m (0.98ft)

**Standard Equipment :**  
Chain Blade, Guide Bar Cover, Hook Complete

\*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.



Outdoor Power Equipment  
Accessories

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BD-BC