



Satisfy Professional's Needs


## Wall Chaser SG1251 125mm (5")

**Clean, compact and comfortable**



Connectable to vacuum cleaners (option) for clean work environment

**Improved trigger switch**

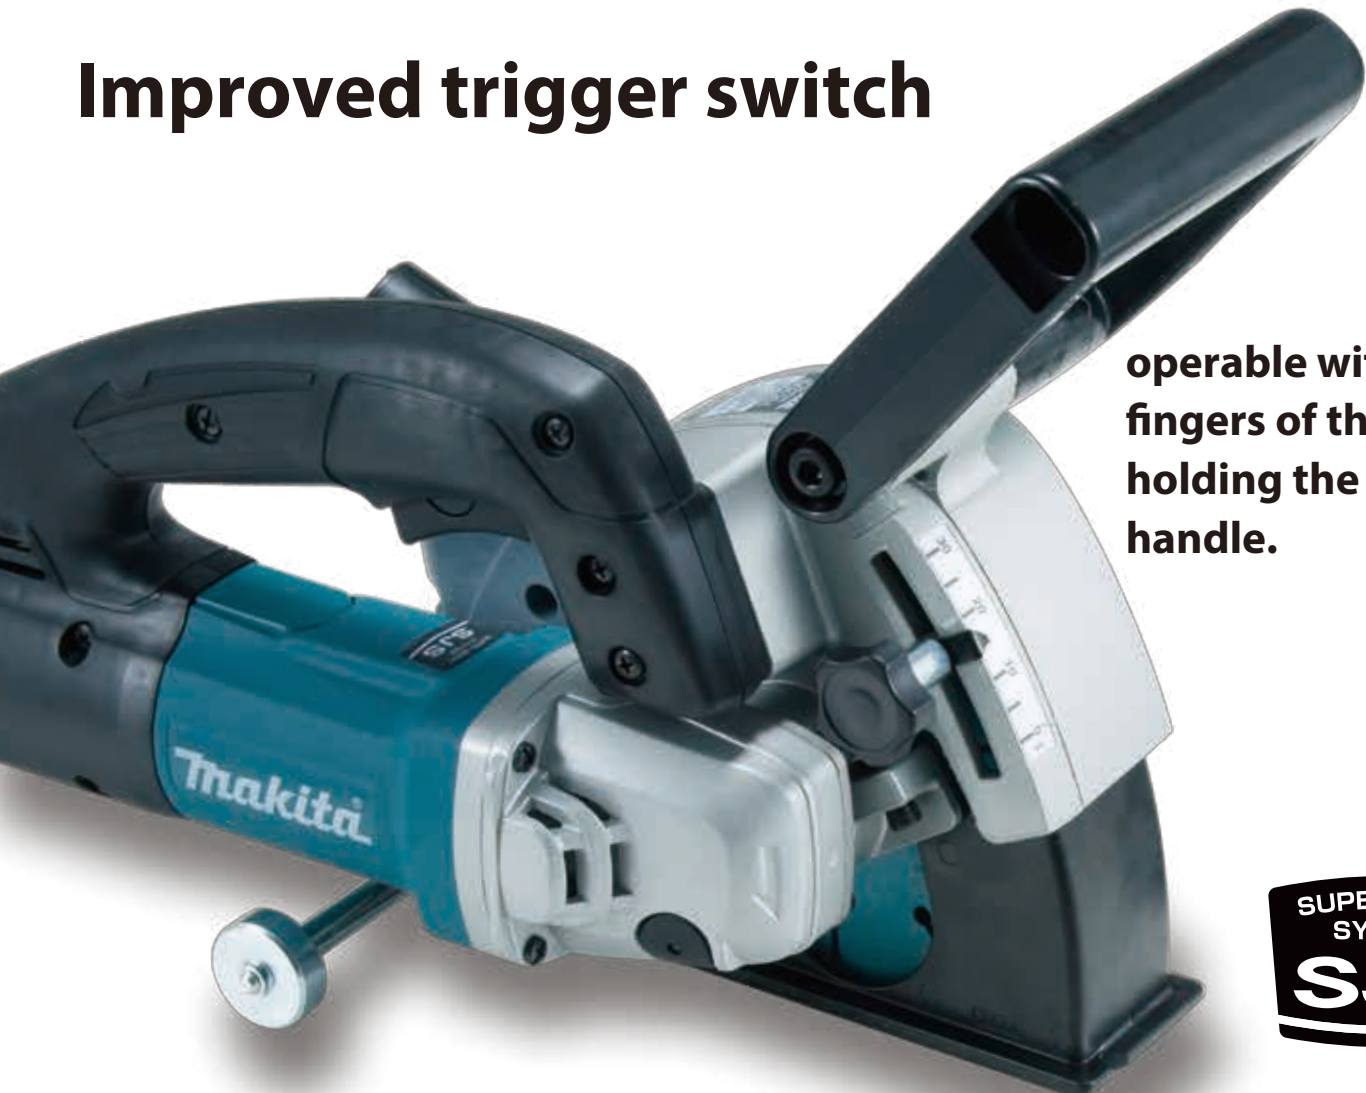

**operable with the fingers of the hand holding the top handle.**



# Wall Chaser offers the most efficient cutting of clean edged grooves for channels.



Ergonomically designed front handle

## Improved trigger switch

- With dust cover to prevent ingress of dust and dirt
- Operable with the fingers of the hand holding the top handle
- With easy-to-pull two-finger trigger



Main top handle with soft grip



Adjustable cutting depth

## Electronic control

- Overload protection
- Soft start
- Constant speed control




Aluminum blade case designed to allow for easy blade replacement



Connectable to vacuum cleaners for clean work environment

## Cutting width

Adjustable cutting width in 9 stage by inserting spacers of 3 mm (1/8") and 6 mm (1/4") in thickness.

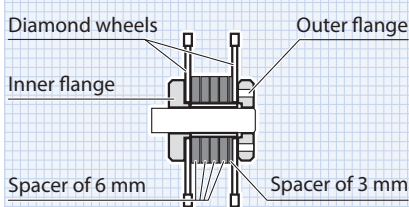

Cutting width	Q'ty of 6 mm spacer	Q'ty of 3 mm spacer
6 mm		1 pc.
9 mm	1 pc.	
12 mm	1 pc.	1 pc.
15 mm	2 pcs.	
18 mm	2 pcs.	1 pc.
21 mm	3 pcs.	
24 mm	3 pcs.	1 pc.
27 mm	4 pcs.	
30 mm	4 pcs.	1 pc.

Wall Chaser		SG1251 125mm (5")	318
	Double Insulation	<b>Continuous rating Input</b> 1,400W	
	Constant Speed	<b>Capacity</b> Depth: 0-30mm (0 - 1-3/16")	
	Soft Start	Width: 6-30mm (1/4 - 1-3/16")	
	Dust Collecting	<b>Blade diameter</b> 125mm (5")	
	Carrying Case	<b>No load speed (rpm)</b> 10,000	
		<b>Dimensions</b> 350x151x178mm	
		(L x W x H) (13-3/4"x5-15/16"x7")	
		<b>Net weight</b> 4.5kg (9.9lbs)	
		<b>Power supply cord</b> 5.0m (16.4ft)	
<b>Standard Equipment :</b>			
Diamond Wheel x2, Hex Wrench, Lock Nut Wrench			

weight according to EPTA-Procedure 01/2003  
Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-AH



Wall Chaser  
Accessories